




P1834

CHANNEL TROLLEY SUPPORT




Requires 3/8" x 2 1/2" Bolt and 3/8" Nut
(not included)

Design Load
1200 Lbs (5.34 kN)

Wt/100 pcs: 102 Lbs (46.3 kg)

P1834A

CHANNEL TROLLEY SUPPORT




Requires 3/8" x 2 1/2" Bolt and 3/8" Nut
(not included)

Design Load
2500 Lbs (11.12 kN)

Wt/100 pcs: 220 Lbs (99.8 kg)


P2749, P2749N†



Clevis Material:
12 gauge.


*Wheel bearings are stainless steel, and
should not be lubricated.

† "N" indicates acetal wheels.



Part Number	Design Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2749	50 .22	21 9.5
P2749N	10 .04	13 5.9


P2751, P2751 N†



Clevis Material: 12 gauge.


*Wheel bearings are stainless steel, and
should not be lubricated.

† "N" indicates acetal wheels.



Part Number	Design Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2751	100 .44	63 28.6
P2751N	20 .09	40 18.1


P2750, P2750N†

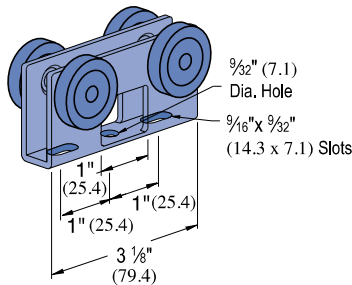

Clevis Material: 12 gauge.


*Wheel bearings are stainless steel, and
should not be lubricated.

† "N" indicates acetal wheels.




Part Number	Design Load Lbs (kN)	Wt/100 pcs Lbs (kg)
P2750	100 .44	55 24.9
P2750N	20 .09	32 14.5

P2950




Wheel bearings are stainless
steel. Do not lubricate.



FPM	RPM	Design Load In P1000 Lbs (kN)
180	600	300 1.33
90	300	450 2.00
30	100	600 2.67

P2949

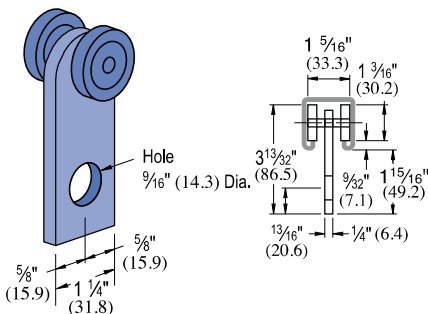

FPM	RPM	Design Load In P1000 Lbs (kN)
180	600	150 .67
90	300	225 1.00
30	100	437 1.94

Wheel bearings are
stainless steel.
Do not lubricate.

Wt/100 pcs: 46 Lbs (20.9 kg)

Wt/100 pcs: 110 Lbs (49.9 kg)

Standard Dimensions for 1 1/8" (41.3mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 1 3/16" (20.6mm); Hole Spacing - On Center: 1 1/4" (47.6mm); Width: 1 1/8" (41.3mm); Thickness: 1/4" (6.4mm) with steel meeting or exceeding ASTM A1011 SS GR 33, or 0.220" (5.6mm) with steel meeting or exceeding ASTM A1011 HSLAS GR 45